

Extreme Temperatures Lighting

Linear High Temperature Lighting

“A real innovation in extreme environment LED lighting.”

- Engineered and tested for reliable operation you can count on in temperatures ranging from -80°C(-112°F) to 115°C (239°F)
- PVDF corrosion resistant coating over a die-cast aluminum housing + stainless steel hardware for incredible durability. 1,000 hour salt-fog test yielded no corrosion. [ASTM B117-19/ASTM D610-08(2019)]
- Instantaneous activation of lighting function, without the need for standby time.
- Game changing LED module design (see details below). Replaceable to reduce the cost of long term ownership.
- Chemical repellent housing to stand up in areas where industrial chemicals are used or produced.
- Provide better eye protection and workplace safety.

We use Nord-Lock washers for optimized safety performance.

NORD-LOCK
PART OF THE NORD-LOCK GROUP

Nord-Lock wedge-locking washers consistently outperform alternative locking methods when it comes to securing bolted joints. This is proven by the results of thousands of Junker tests carried out for customers all over the world by Nord-Lock engineers. When exposed to transverse vibrations underneath the bolt head, alternative locking methods such as plain washers, helical spring washers, check lock nuts, nylon inserted nuts and double nuts all show a loss of clamp load – loosening the bolt and exposing the joint to failure unless frequently retightened. So, Nord-Lock engineers would usually recommend wedge-locking washers to achieve the most secure bolted joint.



The heart of the TTL series is its revolutionary

DRIVER-ON-BOARD LED MODULE.

MIL-STD-810G (-80 °C) + MIL-STD-810H (+115 °C)

A marvel of engineering and innovative manufacturing processes, this proprietary module gives the TTL series outstanding light performance even in extreme hot and cold temperatures and requires no separate driver.

Over-Engineered

We use 12 IC current control chips when 4 would be enough for extra durability. Tested to 200° C without failure.

No Load Shedding

As modules approach their max. rated temperature, lumen output will not decrease. Reducing output at high temp. is a common occurrence with other high temp. lights.

1.2 mil Gold Wire

TTL series LEDs are connected with gold wire for enhanced durability under heavy thermal cycle stress.

No Harmonic Distortion

Quality components and advanced circuit design results in longer fixture life and no line noise generated by the TTL series.

No Inrush Current

Inrush current has been engineered out of the module preventing large line voltage drops at start-up protecting the fixture and other equipment.

Waterproof/Thermal Coating

Special silicone based coating creates a waterproof seal around the module and dissipates heat for increased durability.

SPECIFICATIONS

- Voltage** 120VAC / 277VAC / 347VAC / 480VAC / 600VAC / 250VDC
- Wattage** 10W-140W
- Color Temp** 4000K /5000 K
- Housing** Spraying Plastics(standard) / PVDF optional
- Color** Black
- Lens** Flat tempered glass lens
- Efficacy** 125 lm/W (10W / 20W / 35W)
- CRI** >70
- Beam Angle** 110°
- Cable Gland** Stainless steel
- Power Cord** AWM style 4476 _600V and 200°C rated
- Surge Protection** >15KV
- Ambient Temp.** -80°C (-112°F) to 125°C (248°F)
MIL-STD-810G (-80 °C) + MIL-STD-810H (+115 °C)

LUMENS

10W	20W	30W
1,250 lm	2,500 lm	4,305lm

(one unit, 5000K)

WARRANTY

Ambient Temperature	Warranty Length
65° (149°F) Max Ambient Temp.	7 Year Limited Warranty
85° (185°F) Max Ambient Temp.	3 Year Limited Warranty
105°C (221°F) Max Ambient Temp.	1 Year Limited Warranty



TTL Getter System (optional) — extends lifetime to 3 years @105 °C. It continuously absorbs residual oxygen, moisture, and gases released from internal materials under high temperature, preventing oxidation and degradation.

Ordering Information

Example:TTL-040-50-120V-2




Series	Wattage	Color Temperature	Voltage	Unit
TTL	010	10W	120V 120VAC	1 one unit
	020	20W	277V 277VAC	2 two units
	035	35W	347V 347VAC	3 three units
	020	20W	480V 480VAC	4 four units
	040	40W	600V 600VAC	
	070	70W	250V 250VDC	
	030	30W		
	060	60W		
	105	105W		
	40	40W		
	80	80W		
	140	140W		

Photometrics

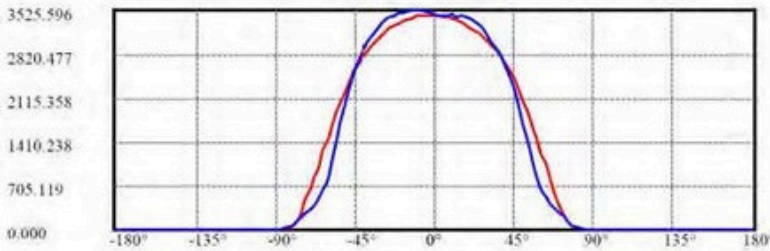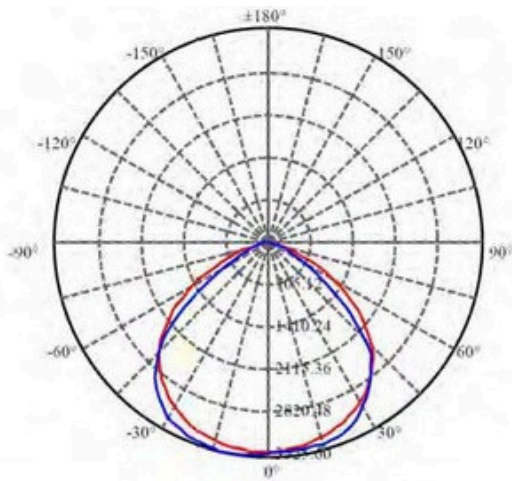

C0/C180: —
C90/C270: —

Dimensions

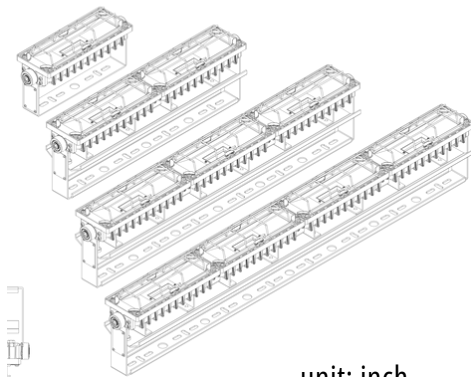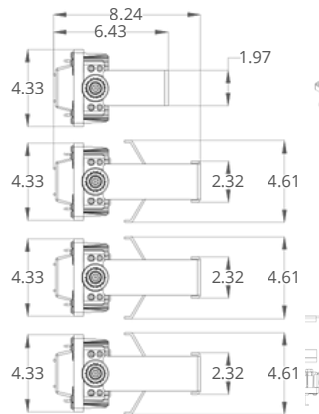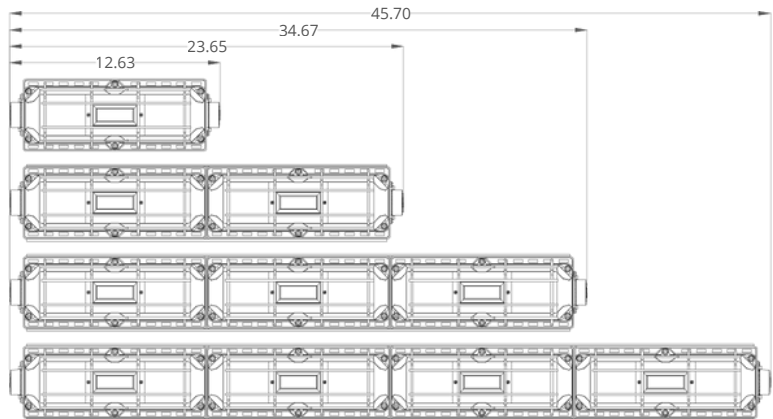

unit: inch

one	1.95Kg(4.30lbs)
Two	3.79Kg(8.36lbs)
Three	5.37Kg(11.84lbs)
Four	7.5Kg(16.5lbs)